


IPVC Flexible Hose

PVC

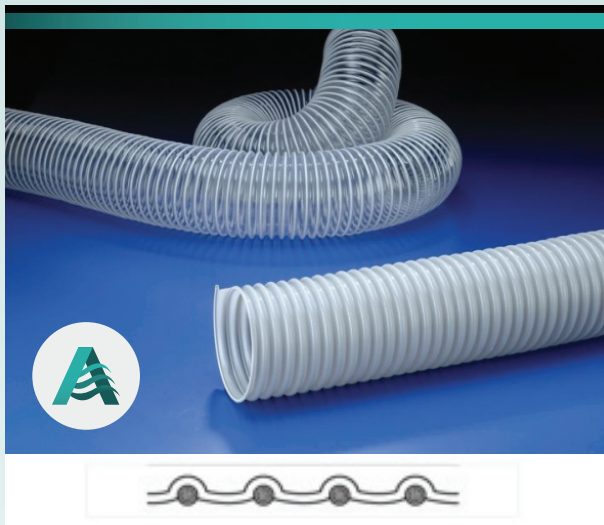

Application:

Low cost solution. Used for powdery solids like dust, powder and fiber. Also used for gaseous media such as vapor and smoke, air conditioning ducting and ventilation.

Features:

- Good resistance to alkalis and acids
- Good resistance to chemicals
- Capable of electrostatic discharge
- Compressible 3:1
- Flame retardant to UL94-HB



Material:

Wall: high-grade soft PVC
Helix: spring steel wire



Working Temperature:

-10deg C to +70deg C

| ID | OD | Length (m/roll) | Working Pressure (bar) | Weight (g/m) |
|-----|-----|-----------------|------------------------|--------------|
| 38 | 46 | 15 | 0.5 | 260 |
| 51 | 59 | 15 | 0.4 | 300 |
| 60 | 69 | 15 | 0.35 | 320 |
| 63 | 72 | 15 | 0.3 | 330 |
| 76 | 85 | 15 | 0.27 | 400 |
| 80 | 89 | 15 | 0.25 | 450 |
| 90 | 99 | 15 | 0.23 | 480 |
| 102 | 110 | 15 | 0.2 | 570 |
| 120 | 129 | 15 | 0.17 | 730 |
| 127 | 135 | 15 | 0.16 | 770 |
| 140 | 149 | 15 | 0.15 | 840 |
| 152 | 160 | 15 | 0.14 | 900 |
| 160 | 169 | 15 | 0.13 | 970 |
| 178 | 187 | 15 | 0.12 | 1150 |
| 203 | 213 | 15 | 0.1 | 1300 |
| 230 | 239 | 15 | 0.09 | 1600 |
| 254 | 263 | 15 | 0.08 | 2000 |

