


# IFlexible Welding Hose

## PVC fabric hose

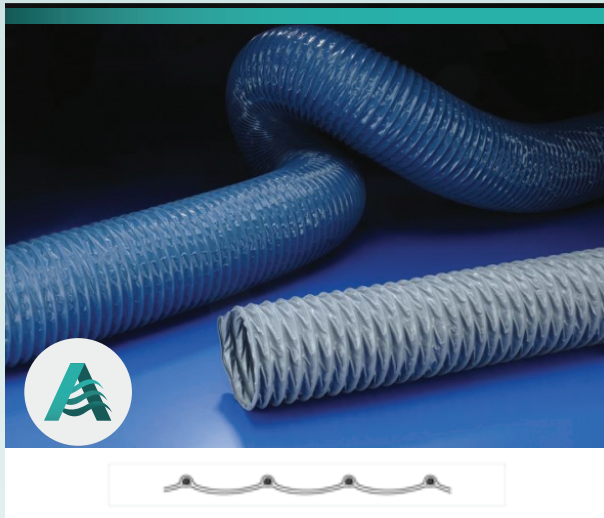

### Application:

For welding gas extraction. Also used for air conditioning and ventilation of fumes, light duty dust extraction and air movement.

### Features:

Fabric reinforced | Good resistance to alkalis and acids  
Good resistance to chemical UV and ozone  
Steel wire reinforced | Highly flexible and compressible 6:1  
Superior resistance against inside and outside pressure  
Excellent corrosion resistance  
Capable of electrostatic discharge  
Flame retardant to UL94-V2



### Material:

Wall: PVC coated fabric  
Helix: spring steel wire



### Working Temperature:

-10deg C to +80deg C

ID	OD	Length (m/roll)	Working Pressure (bar)	Weight (g/m)
38	48	10	0.28	170
51	60	10	0.24	180
63	72	10	0.2	200
51	59	15	0.91	320
76	85	10	0.16	230
80	89	10	0.15	250
90	99	10	0.14	290
80	88	15	0.559	560
90	98	15	0.507	590
102	111	10	0.12	320
114	123	10	0.11	380
120	128	15	.377	740
127	136	10	0.1	420
140	149	10	0.09	450
152	161	10	0.08	550
160	169	10	0.075	650
178	187	10	0.07	750
203	212	10	0.06	860
254	263	10	0.05	1200
305	314	10	0.04	1300
355	364	10	0.035	1700
406	415	10	0.03	1900

