


# I Radial Fans 7.5kW to 30kW

Range of SovPlym industrial fans of HPF series offers flow rates up to 25000 m<sup>3</sup>/h and pressures up to 5400 Pa. These fans are suitable for non-explosive environments.

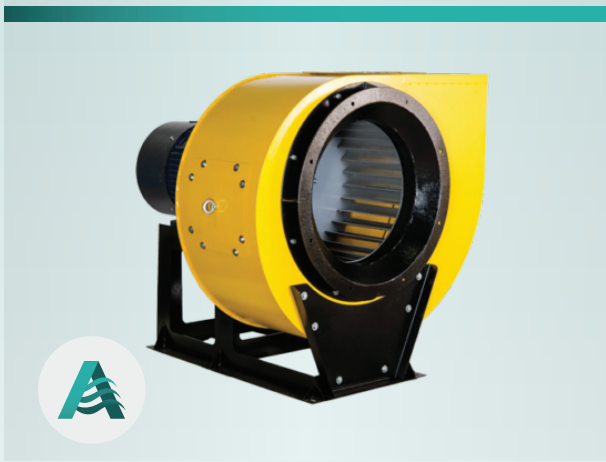

## Applications:

- Welding applications
- Vehicle exhaust removal
- Removal of oil mists and fumes
- Removal of non-sticky and non-explosive kinds of dust

## Features:

- Low vibration
- Long service life
- Low noise level
- Easy installation
- Robust design
- High energy-efficiency



## Operating Temperature:

-40° to +80°C.


Fan type	Full pressure, Pa	Airflow, m <sup>3</sup> /h	Electric motor (3 phase)				Diameter of inlet, mm	Size of outlet, mm	Noise level dB	Weight, kg
			Power, kW	Voltage, V	Frequency, Hz	Frequency, rpm				
HPF-1200	2800-1100	2000-12000	7.5	380	50	2910	450	315x315	90	113
HPF-1200/LI (RI)								Ø500	80	247
HPF-1500	3500-1200	3000-15000	11	380	50	2890	500	350x350	95	168
HPF-1500/LI (RI)								Ø630	85	372
HPF-1800	3900-1300	3500-18000	15	380	50	2930	500	350x350	95	215
HPF-1800/LI (RI)								Ø630	85	420
HPF-2000	4700-1700	4500-20000	22	380	50	2940	560	392x392	100	280
HPF-2000/LI (RI)								Ø630	90	488
HPF-2500	5400-1800	5000-25000	30	380	50	2940	560	392x392	100	311
HPF-2500/LI (RI)								Ø630	90	523

Searose Environmental  
Proud Suppliers of



Searose Environmental

1300 48 48 49  Searose.com.au  info@searose.com.au

 Unit 8, 13-14 Enterprise Street, Cleveland, 4163, QLD, Australia